


Kaushico
AN ISO 9001:2000 COMPANY

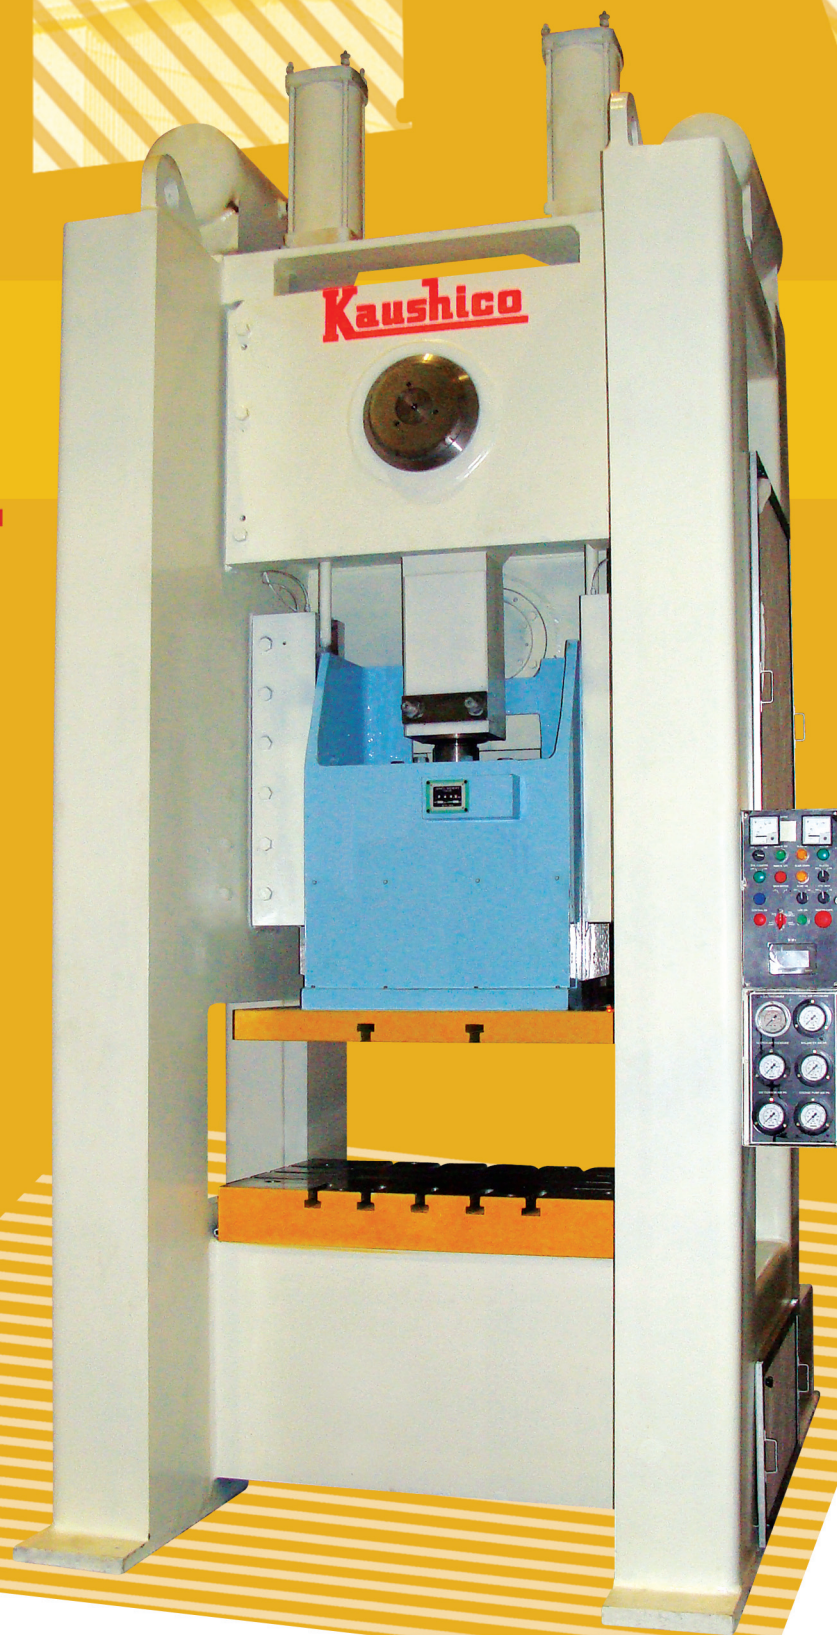

Model - KSF

KAUSHICO SOLID FRAME PRESSES

Kaushico Solid Frame presses are unitized compact straight sided presses designed for minimal elongation and virtually eliminates angular deflections. It reduces the die maintenance cost considerably and increases the die life. Extra long '6' Point guides are centrally located in the slide to provide better resistance to the off centre loads.

KAUSHICO SOLID FRAME SINGLE POINT PRESSES

Model		KSF-80	KSF-100	KSF-125	KSF-160	KSF-200	KSF-250	KSF-315
Capacity	Tonne	80	100	125	160	200	250	315
T.R.P.	mm	5	5	5	6	6	6	6
Stroke Length	mm	100	150	150	200	250	250	250
SPM-Fixed	SPM	55	50	50	45	35	30	25
Shut Height	mm	300	350	350	400	450	450	500
Slide Adjustment	mm	80	100	100	100	120	120	150
Slide Area (LRxFB)	mm	700x460	800x520	800x520	900x580	1000x650	1100x720	1100x720
Bolster Area (LRxFB)	mm	900x600	1000x680	1000x680	1150x760	1250x840	1350x900	1350x900
Bolster Thickness	mm	110	125	125	150	170	190	200
Main Motor	KW	7.5	7.5	11	15	18.5	22	30

STANDARD FEATURES & ATTACHMENTS OF THE PRESS

- PLC equipped electrical control panel
- Hydraulic Overload safety device
- Pneumatic combined Clutch & brake unit
- Electric motor of reputed make
- 2 Nos pneumatic slide counter balancers
- Pneumatic Knock out ejector
- Motorised slide adjustment with brake motor
- Pressure switches, Filters & Regulator for Clutch, Balancers & Die cushion
- Automatic Centralised grease pump for lubrication
- 3 Position Cam Limit Switch
- Bolster & Slide Face with standard 'T' Slots
- Dual Sensing Solenoid valve with Rotor Seal
- User friendly multifunction control system



KAUSHICO MACHINE TOOLS PVT. LTD.

Plot No. 250, Sector-24, Sohna Road, Faridabad - 121005, Haryana, India

Tel. : 91-129-2232814, 2232803, 4060382

Fax : 91-129-4061381, 2290063

Email : kaushico@airtelmail.in, kaushico@vsnl.net

www.kaushico.com